

FIG. 1

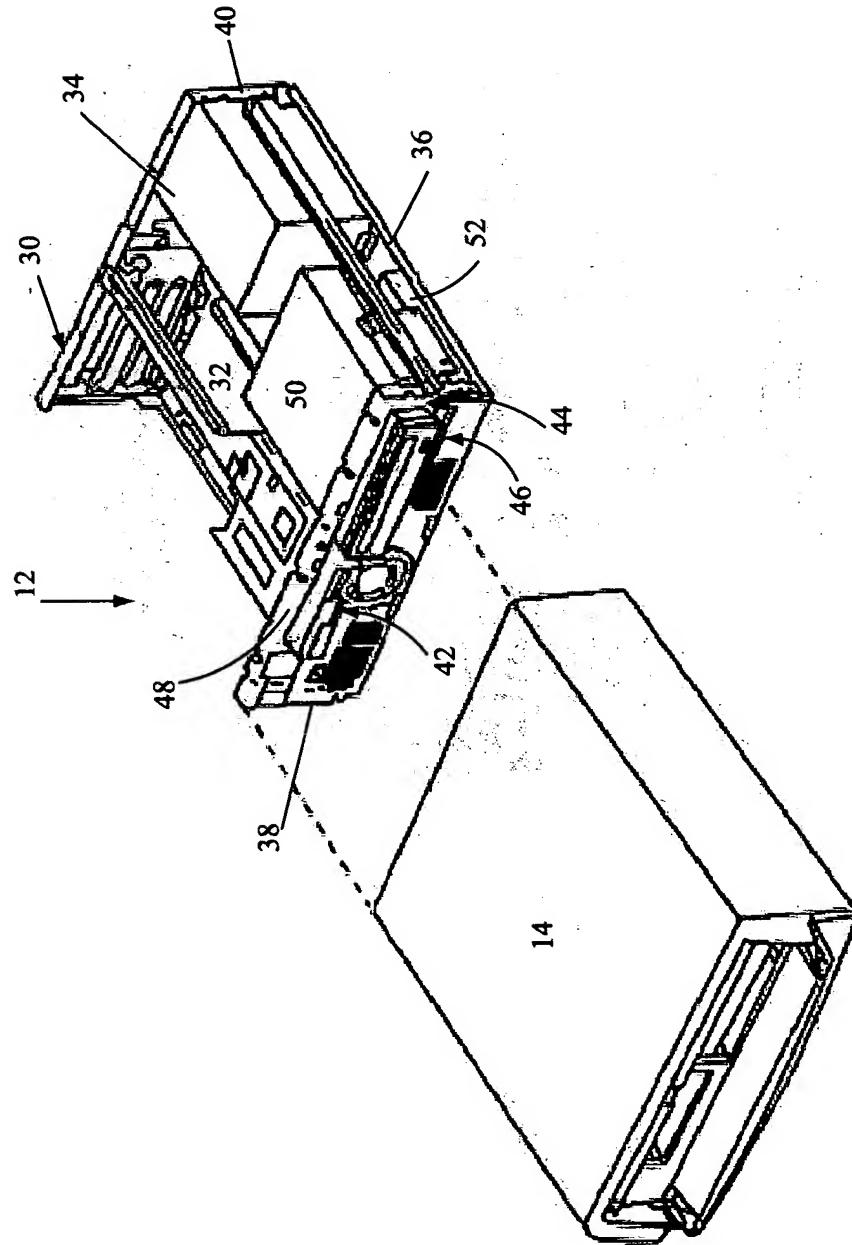


FIG 2


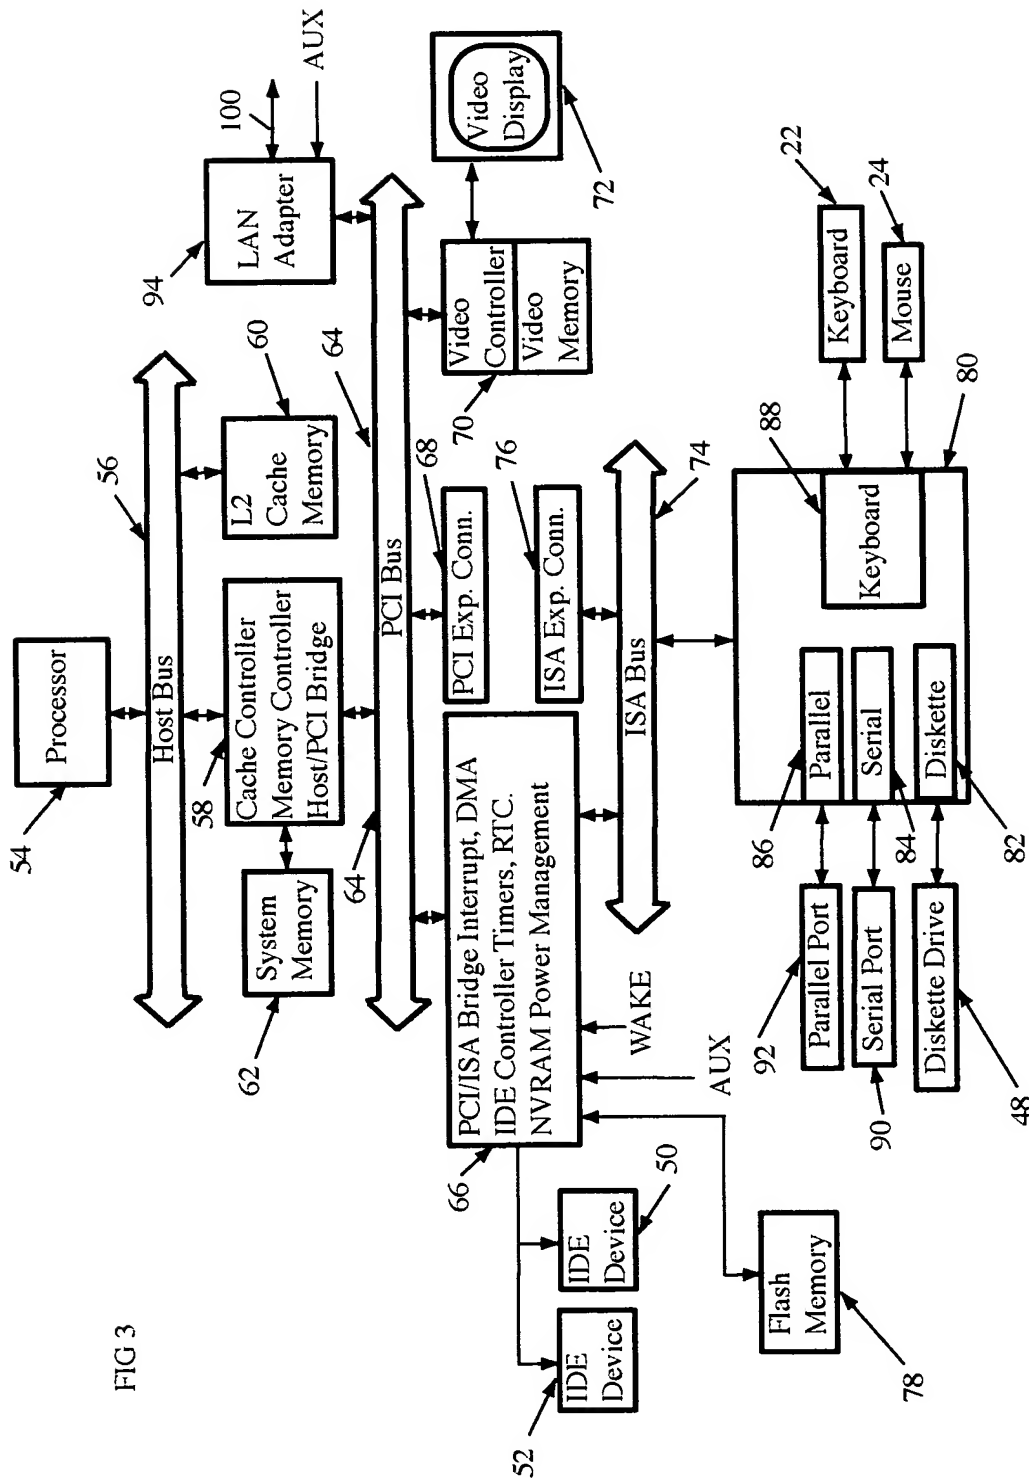


FIG 4

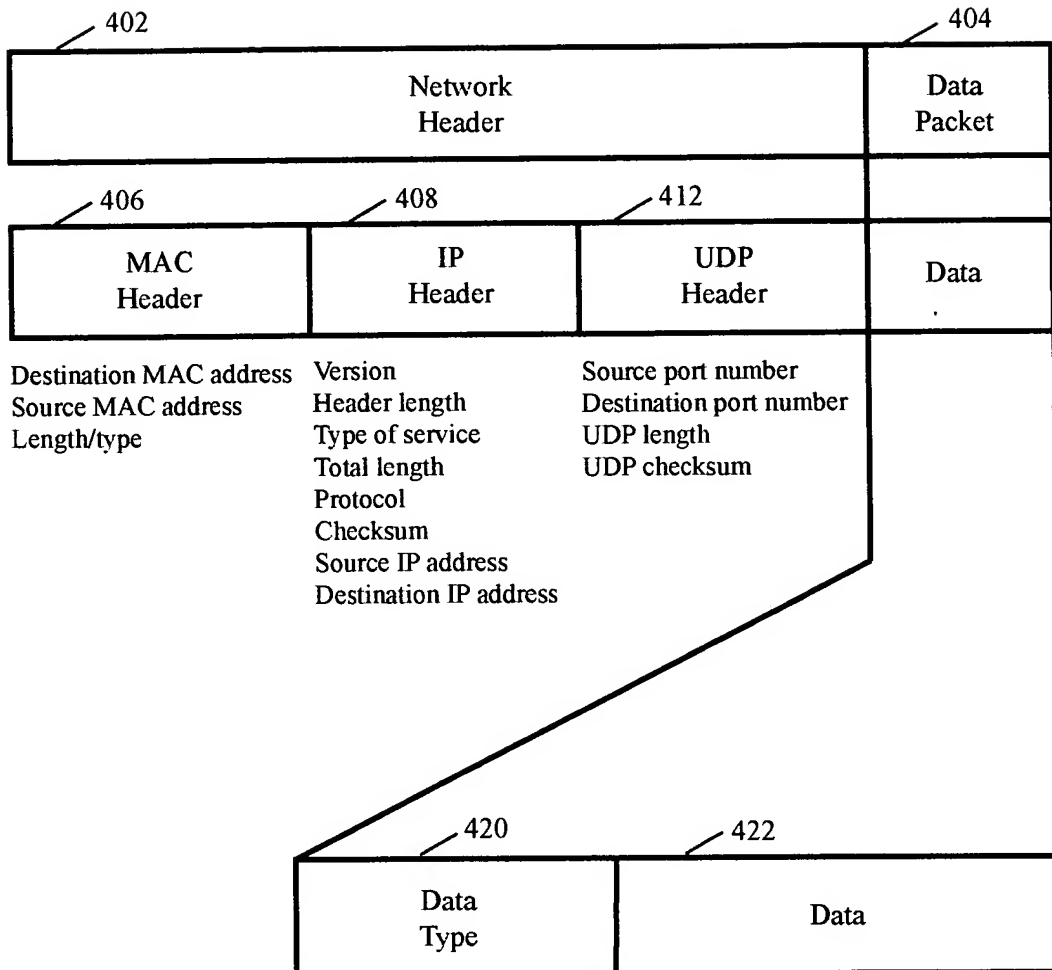

Defines format for data  
(length 1 byte)  
01H = ID and Capabilities  
02H - FFH = Res

00-F: UUID (16Bytes)  
Unique Universal ID  
01-01F: System Serial Number  
20-25: IEEE Address  
(MAC address)  
26-2F: Ethernet Vdr & Sub VDR ID

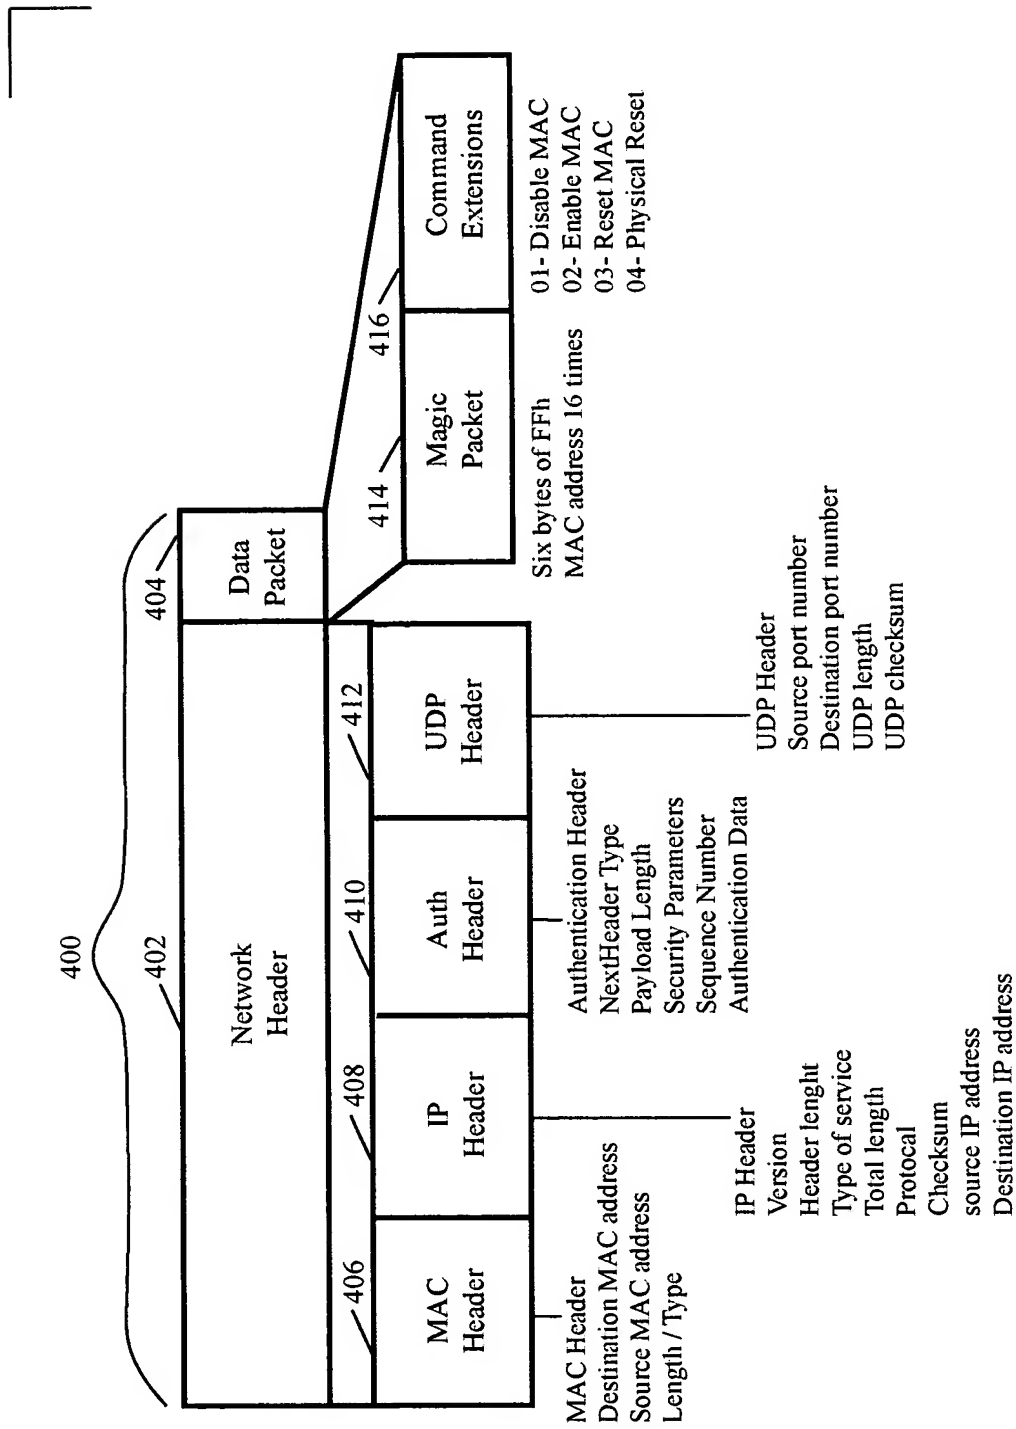


FIG 5

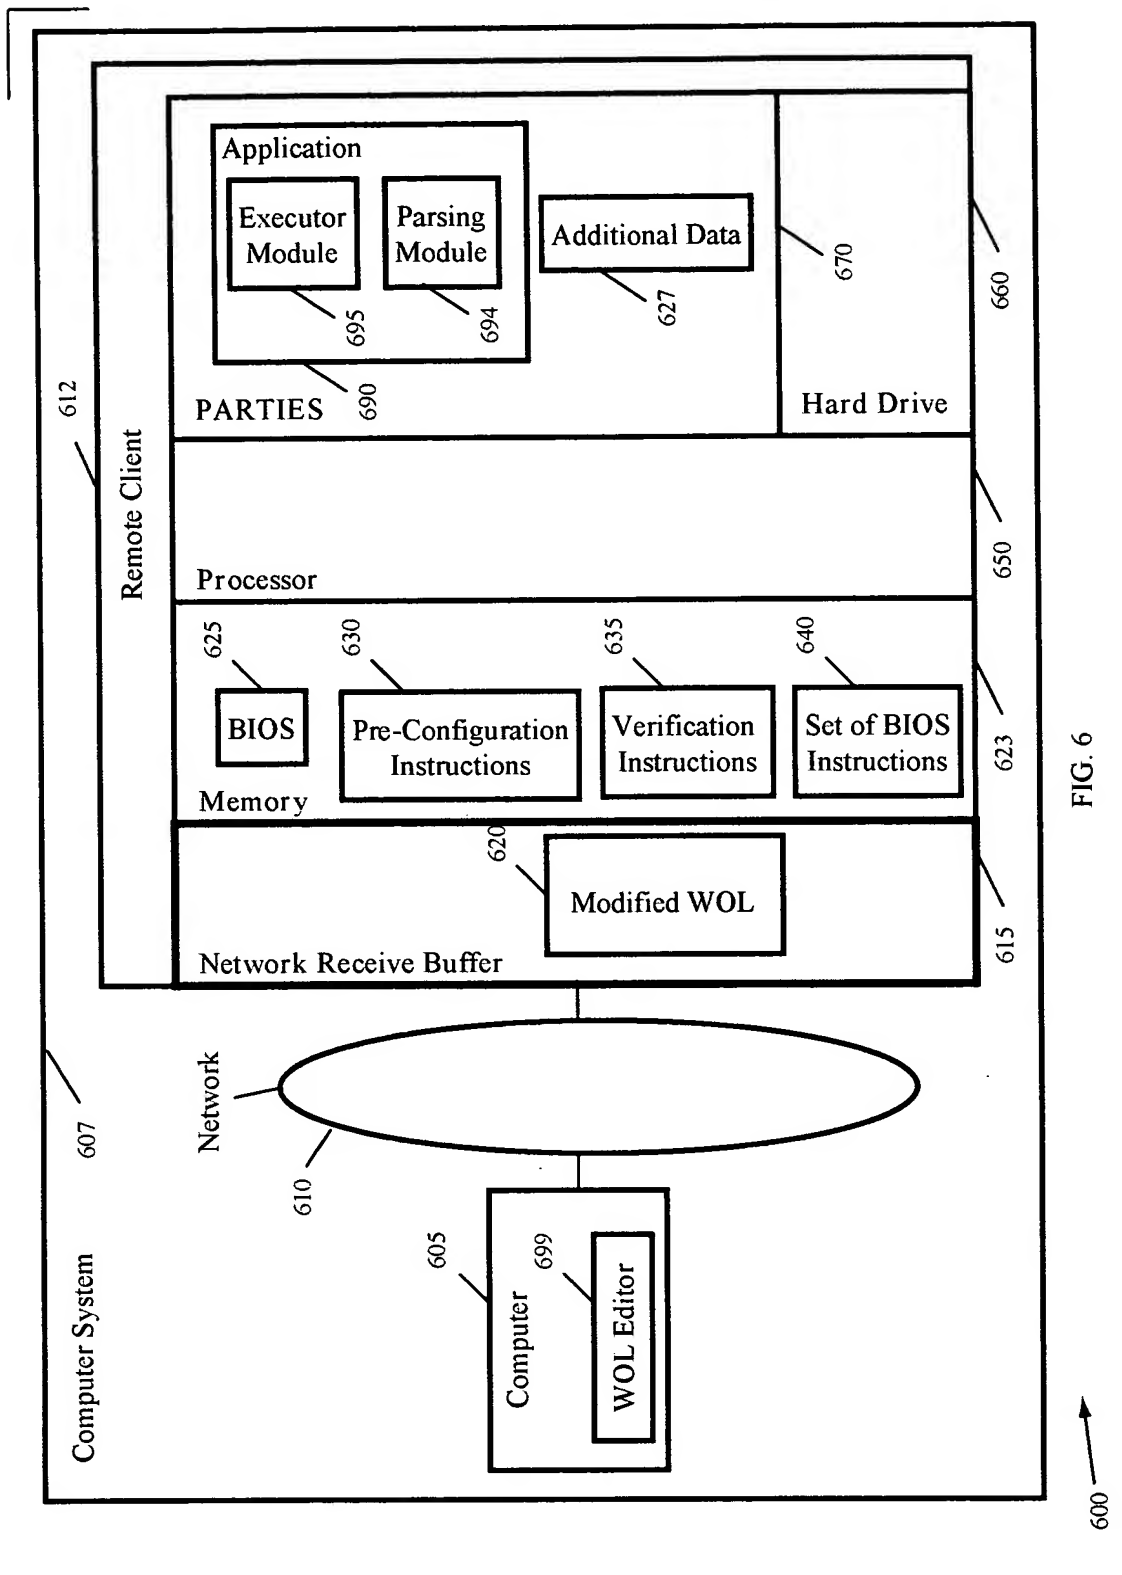


FIG. 6

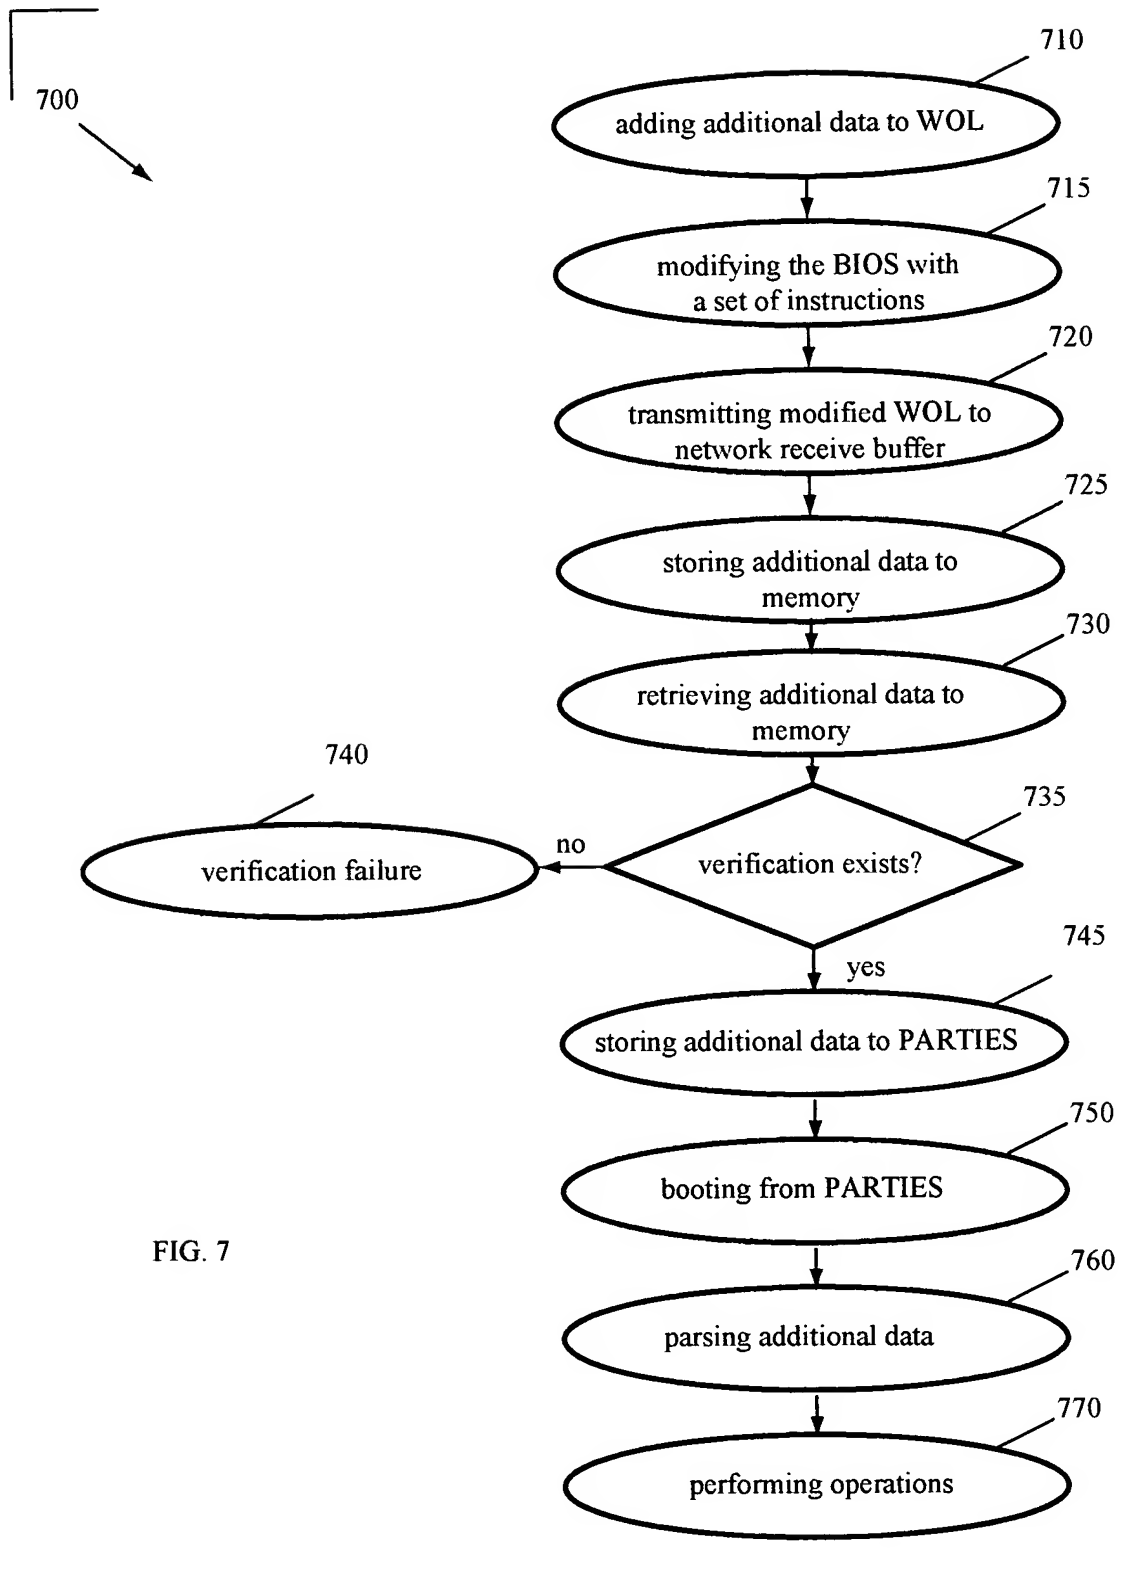


FIG. 7